
## DT SERIES FLOODED BATTERY


# DT1275 (12V150Ah)







# 278.5±2







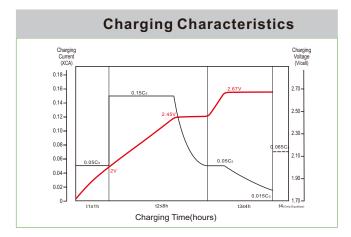



Designed in compliance with applicable BCI standard. Tested in compliance to BCI standard.

### Leoch International Technology Ltd.

www.leoch.com

### **Leoch Batteries Pte Ltd**

www.leoch.sq

### **CHARACTERISTICS**


14		0
Item		Specifications
Voltage		12V
Dimension	Length	328mm (12.9inches)
	Width	180mm (7.09inches)
	Container Height	248mm (9.76inches)
	Total Height	279.5mm (11.0inches)
Approx Weight		36.7kg (80.9lbs)
Terminal		DT-M8(A)
Container Material		PP
Rated Capacity	20HR	150Ah
	5HR	120Ah
Reserve Capacity	25A	280min
	56A	102min

### **GENERAL FEATURES**

- Long cycle service life, strong recovery ability of deep discharge
- · Low risk of thermal runaway, easy maintenance
- · High energy, low internal resistance, low self-discharge
- · Reliable sealing structure ensures no leakage during use
- · Special design and structure increase battery performance
- The special alloy improves the corrosion resistance of the plate increases the service life and good deep discharge performance

### **APPLICATIONS**

- · Electric vehicle
- · Cleaning equipment
- Golf cart
- AWP
- · Sightseeing bus
- Marine&RV

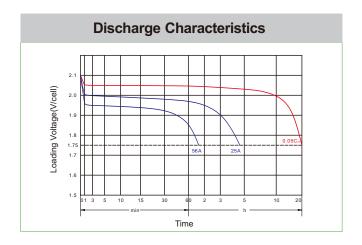

Leoch Battery Corporation

www.leoch.us

Leoch Europe S.A.

www.leoch.eu

www.ieocn.eu